


GALLERY® collection

Models GR2SP, GR2LP (9.0 R-Value*)
Models GR1SP, GR1LP (6.5 R-Value*)



Shown: Design GR1LP with ARCH2 windows with grilles and Ultra-Grain® Medium Finish

3-LAYER CONSTRUCTION



① Steel + ② Insulation + ③ Steel

9.0
R-VALUE*
2" insulation

6.5
R-VALUE*
1 3/8" insulation

PRODUCT SPECIFICATIONS

- 27 gauge patented deep emboss panel with a vertical ribbed pattern is pressure bonded for quiet operation.
- 2" thick polystyrene insulation available (Models GR2SP, GR2LP). R-value 9.0*, 1 3/8" thick polystyrene insulation available (Models GR1SP, GR1LP). R-value 6.5*
- Hot-dipped galvanized steel skin with a baked-on primer and top coat helps assure long-lasting beauty.
- Nylon rollers for durable, smooth, long-lasting performance.
- Patented Safe-T-Bracket® designed for added safety; under normal circumstances it cannot be removed while the door is under tension.
- Tongue-and-groove joints and bottom weatherseal in a rust-proof aluminum retainer help seal out the elements.
- 12" radius track for normal installations. 15" radius track available.
- Extension springs standard on single doors (up to and including 10'). EZ-SET® torsion springs standard on all double doors (greater than 10' wide).
- Inside slide lock is standard, outside keyed lock available (at additional charge).
- Operator reinforcement bracket is standard.
- Spade Lift Handles and Spade Step Plate are standard.

STYLE & FINISH

- Patented deep emboss panel stamp is available in both the Short emboss panel (GR2SP, GR1SP) and the Long emboss panel (GR2LP, GR1LP) to complement any home's style.
- Finish may be painted to complement the home's exterior.
- Windows are made from 1/8" DSB or Obscure glass with optional Snap-In grilles. Optional 3/4" insulated DSB glass or insulated obscure glass available. The window frames and grilles are UV-protected. Acrylic Wrought Iron windows also available.
- Ultra-Grain® wood colors available (see G4 for pricing).

SIZES

- Available in heights from 6' to 12' in 3" increments.
- Model GR2SP from 6'2" to 20', in 2" increments; Model GR2LP from 7'8" to 20', in 2" increments.
- Model GR1SP from 6'2" to 18', in 2" increments; Model GR1LP from 7'8" to 18', in 2" increments.

EXCEPTIONS

- Doors not available in widths from 10'2" through 11'4" or 14'8".
- Windows not available on 14'10" and 15'4" widths.
- Door widths requiring single spade handle or Twisted "T" design keyed lock: 6'2", 6'4", 6'6", 7'8", 7'10", 11'6", 11'8", 11'10", 14'10" through 15'10" and 19'2" through 19'10".

SPECIAL NOTES

- For doors sold through Home Depot's Expert Installation Program, the springing systems and locking systems may vary by market.
- Doors ordered in white unless a color is specified.

*Calculated door section R-value is in accordance with DASMA TDS-163.

STANDARD HEADROOM REQUIREMENTS

Extension Springs		Torsion Springs	
Track Radius	Headroom Needed*	Track Radius	Headroom Needed*
12"	10"	12"	12"
15"	12"	15"	14"

* Add 3" for automatic garage door opener

MODELS

Short Panel



GR2SP / GR1SP

Long Panel



GR2LP / GR1LP

COLORS





White Almond Desert Tan Sandtone Chocolate



Medium Finish Dark Finish Walnut Finish

(Additional cost see pg. G4) (Printed colors may vary from actual panel colors)

WINDOWS / TOP SECTIONS

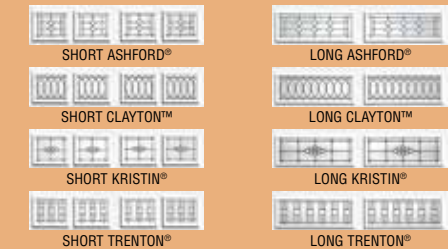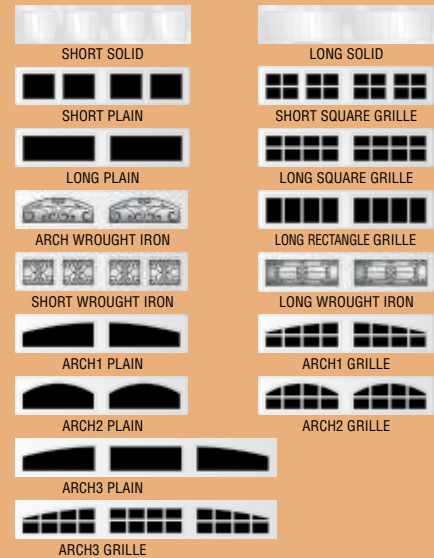

DECORATIVE HARDWARE

Standard Hardware:



Spade Lift Handles
(4118684)



Spade Step Plate
(4119015)

See page G4 for complete hardware options.

WARRANTIES

PAINT SYSTEM LIMITED LIFE WARRANTY	WINDOWS LIMITED 10YR WARRANTY	HARDWARE LIMITED 3YR WARRANTY
---	--	--

